

VICTORIA COUNTS – A CASE STUDY WITH ELECTRONIC VIOLIN BOW

Knut Guettler

Norwegian Academy of Music
Dept. of Composition and
Music Technology
P.O.B. 5190 Majorstua,
0302 Oslo – Norway

Hans Wilmers

Norwegian Centre for
Technology, Acoustics, and
Music (NOTAM)
Nedre gate 5,
0551 Oslo – Norway

Victoria Johnson

Norwegian Academy of Music
Dept. of Composition and
Music Technology
P.O.B. 5190 Majorstua,
0302 Oslo – Norway

ABSTRACT

This paper gives a glimpse into the ongoing process of equipping a violin bow (as well as the violin itself) with electronics adequate for real-time manipulation of the sound. In this project there exist several sound sources: (1) the violin sound, which is picked up by built-in microphones of the electric violin, (2) a number of pre-recorded everyday sounds to be cued in by the performer during performance, and (3) several pre-recorded series of counting, where the performer's voice is heard. Controlled by bow gestures these different sounds are filtered through one or more Max/MSP patches followed by playback through a quadrasonic speaker system. From time to time permutations of objects between speakers, including the movement on stage by the performer herself, take place.

1. INTRODUCTION

There exist already a number of techniques for bow-gesture capture, some of which have been used for sound manipulation or synthesis [1],[2],[3],[4],[5]. Typically, one finds miniature accelerometers and gyroscopes utilized for recording the bow's movement, and strain gauges included for measurements of bow force ("bow pressure") against the string. Other sensors, such as radio transmitters/antennas, and separate video cameras (recording markers on bow and instrument), have also been utilized, but may be problematic for real-time sound manipulation if used by an improvising performer, moving on stage.

The most straightforward task with existing techniques is to cue patches by use of acceleration or angular velocity (delivered by the gyroscopes). In these cases a simple pattern-recognizing algorithm can cue initiation of patches when confirmed. We are then talking about "switched-on" systems. However, filters that are continuous over an extended range—e.g., shelving- or peak filters where the player can control the boost frequency in order to emphasize certain spectral features—are not so easily implemented, simply due to the non-DC nature of the sensors, which makes reliable real-time integration difficult. For miniature accelerometers, the effect of gravity changing with bow angle is also an important obstacle.

With ideal sensors, one could easily utilize bowing gestures that are not commonly used in "normal playing" for controlling continuous filters or filter banks. E.g., the tilt angle of the bow hair with respect to the string makes very little spectral difference after the tone onset on an acoustic instrument. With fair-resolution information about this tilt angle, it would be easy to control a peak filter's centre frequency.

2. THE PROJECT "VICTORIA COUNTS"

2.1. The artistic concept

The Armenian philosopher and mystical Georges Ivanovitch Gurdjieff once gave a student the exercise to count from 1 to 50 and backwards seven times. This exercise should show the student how difficult it is to concentrate even on something that easy as counting. Continuous streams of thoughts, memories and associations try to take away our concentration. The composer Henrik Hellstenius has provided violinist Victoria Johnson with a piece based on this counting exercise, where also trivial domestic everyday distractions are mixed in.

While counting provides the background, a relatively slowly-moving solo part, with frequent occurrences of dissonant double stops and other whims, is subjected to gentle sound filtering in order to create a variety of textures and sonorities along with the pre-recorded sound clips.

2.2. Interfacial requirements

This piece was originally performed with the assistance of a sound technician, who would start and stop the sound clips, and adjust Max/MSP patches, e.g. to achieve granulation of the violin sound, etc.

In the present setup, the player must herself be able to start and stop the sound clips from the bow, as well as choosing adequate filtering/mapping for all musical situations that should occur in the piece. Since a good part of this is improvised, the filter setup cannot be fixed to a predetermined sequence, but individual configurations need to be invoked through some sort of devoted gesture. The omission of technician is meant to give the violinist more freedom of expression, so it is

paramount that the electronic interfaces are not perceived as extra obstacles.

2.3. Switches and sensors

In addition to the 3D accelerometers and 2D gyroscopes we mounted two switches and one pressure sensor in the vicinity of the frog. The switches were positioned on the stick just in front of the wrapping, a few millimetres away from where the right-hand index finger is normally placed. With two adjacent switches it is relatively easy to change between a number of programs, patches or other cues used in the performance. The pressure sensor was placed on the wrapping just below the middle finger (which normally remains rather inactive during playing), and is meant for fine adjustment of filters. Adjustment can also be made by means of bow tilt or other movements, but as was said before, since these sensors do not respond to position directly, the effect will be somewhat delayed, and precision somewhat harder to achieve.

However, the bow is not the only part of the instrument that is furnished with electronics. As has been demonstrated by Diana Young with her Hyperbow, mounting a more or less identical set of sensors on the body of the instruments facilitates cancellation of motions where the bow and violin move in parallel, for instance when the player moves her body or changes position on the stage. But, this also opens for using the movements of the instrument body separately (not for cancellation) at certain instances, when desirable.

A different kind of sensor we want to include on the body is a miniature 2D electronic compass, picking up the earth magnetism. In the piece “Victoria counts” Victoria moves in between four speakers (with the audience preferably seated around). The movement is accompanied by shifts between speakers of the recorded sound sources (“change of view”). With the magnetic sensor this could be administered effortlessly.

2.3.1 The bow-force sensor (discussion)

So far a bow-force (“bow-pressure”-) sensor has not been mentioned. There is a reason for that. Different from other violin motion-capture systems we have decided to omit it. In principle three different systems have been designed for measuring the bow-hair’s force against the string. Askenfelt, who was first, had the bow hair cut and glued on to thin metal strips fastened at the tip and the frog [6]. When applying force against the string these strips were bent and the amount of bending picked up by strain gauges fastened to the metal.

Demoucron’s system [3] is a further development of Askenfelt’s approach, and seems to be the most widely used system at present. To our knowledge it is also by far the best and most reliable. Demoucron’s device is a small bracket fastened to the D-shaped ring (ferrule) of the bow’s frog. At the end of the bracket, which is equipped with strain gauges on both sides, a small wooden cylinder is pressed against the bow-hair ribbon

and deflects with its changing angle during playing. In the calibration equation that follows, both playing position along hair length and bow hair tension are necessary terms, so precision increases with use of optical devices. If during practical performance the player adjusts the hair tension, this to some extent interferes with calibration.

The third approach is to place the strain gauges on the bow stick at positions where the stick is deflecting during playing [4]. There are several problems involved here. First, the deflection of stick varies considerably more with the bow/string’s contact position than does the angle of bow-hair: from negative by the frog to positive by the tip when played with constant bow force. Second, signals get very weak when playing close to the frog. Third, when playing rapid dynamic strokes, such as spiccato, the stick bending is not in phase with the bow force. (When the bow is thrown onto the string, the string’s force against the hair tends to straighten the bow stick. When the index finger is pressing on the stick, this effect is counteracted).

The only real advantage with the third approach is that electronics are out of the way for the player, who otherwise easily could hit and break the electronics when using the full hair length during playing (like most skilled players prefer).

Our solution to the problem is to use the microphone signal as reference when trying to derive bow-force information. As it happens, the spectral envelope (slope) has been shown to be function of bow force and bow speed only, that is, independent of contact point on the string(!) [7]. A fast algorithm (FFT not needed) for determining the approx. energy ratio between band-passed 5.0 – 7.5 kHz and low-passed 2.5 kHz, gives, after some smoothing, a fair indication of bow force variations, suitable for controlling some filters.

3. TECHNICAL INFORMATION

This section is merely a list of the devices we have applied and found useful. Our technical approach is to find a way to measure physical properties in a nonobstructive way. We solved this by making a small unit that can be mounted on the bow or on the instrument, and that measures acceleration (3D) and gyration (2axes). To get further control possibilities, we mounted a pressure sensor and switches that could be activated by the fingers holding the bow. The measuring unit sends data to a computer via a Bluetooth transmitter.

For measurements of acceleration an ADXL330 3D accelerometer made by Analog Devices is used. It features 3 analogue outputs for acceleration along each of 3 axes, and is capable of measuring up to ± 3 g.

To measure angular velocity an IDG300 dual axis gyroscope of InvenSense is used. It features 2 analogue outputs for angular velocity around each of 2 axes, and is capable of measuring up to ± 500 deg/s.

To sample and filter analogue and digital data, a C8051F530 microcontroller made by Scilabs is used. It

features an internal 12 bit A/D converter with up to 16 external inputs and a sample rate of up to 200 ksp. This allows us to apply simple digital filtering to the input signals, before the data is sent further through the Bluetooth link.

To transmit the signals wirelessly, the Bluetooth module RN-41 made by Roving Networks is used. It allows us to send serial data from the microcontroller transparently to a Bluetooth-equipped PC.

All electronic components are capable of running on 3 – 3.6V. The prototype is powered by a 3-cell NIMH battery, but usage of other batteries will be examined.

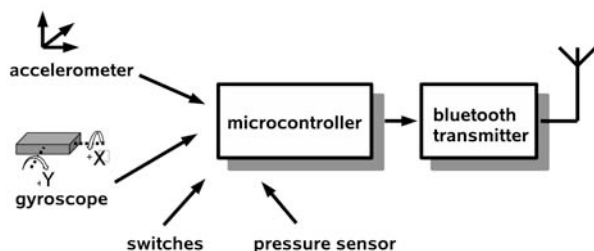


Figure 1. Block diagram of sensor/microcontroller setup.

4. CONCLUDING DISCUSSION

The electronic equipment described above is of course not meant for one single piece of music alone. But the many intrinsic challenges of this particular composition make it very suitable as a starting point for the development of a more general electronic-bow system (or even a system for other instrumentalists whose playing techniques involve carefully controlled limb movements). Our intention was never to do high-quality measurements of bowing parameters. To do that, supporting optical measurements seem inevitable with today's technology. Our focus is on *extending* the violinist's palette of tone colours, and to do so *without replacing one set of colours with another one*.

The violin bow is unique when it comes to spectral control and envelope shaping for an acoustic instrument. The action is very direct, although the tone buildup is normally not as fast as for most wind instruments. On the other hand, when shaping attacks the dynamic properties of the bow can often be utilized for creating a desirable development, which means that one on beforehand can give the bow a certain (rotational) velocity/momentum towards the string and rely on the bow to do the remaining work as it hits it and the tone starts.

We feel that these qualities are very important to safeguard and they should not be sacrificed for the benefit of triggering a novel patch or two, as such a path would easily lead to a more restricted instrument. So, we are looking for bowing gestures that are *available*,

meaning that are not commonly utilized for sound shaping.

There is also the theatrical or scenic aspect: The gesture should preferably melt in as a natural part of bodily expression in the act of conveying musical ideas. An example of the opposite is the musician who takes a step or two forward to press a pedal with the result that the sound from his instrument (loudspeaker) changes instantly and completely.

To sum up: we are trying to combine gestures and sensors in a way that facilitates extended control of the sound picture and will carry this out smoothly and naturally in response to the player's instant ideas. At the same time we are searching for ways to *trigger* certain events such as on/off sound recordings, lights, video, etc., like exemplified in the piece "Victoria Counts".

5. REFERENCES

- [1] F. Bevilacqua, N. Rasamimanana, E. Fléty, et al., "The augmented violin project: research, composition and performance report." Proc. NIME'06 (2006), Paris, IRCAM
- [2] E. Schoonderwalt, N. Rasamimanana and F. Bevilacqua, "Combining accelerometer and video camera: Reconstruction of bow velocity profiles". Royal Institute of Technology (2006). www.speech.kth.se/prod/publications/files/3139.pdf.
- [3] Demoucron, M.; Askenfelt, A.; Caussé, R. (2006), "Mesure de la 'Pression d'Archet' des Instruments à Cordes Frottées, Application à la Synthèse sonore ", *8ème Congrès Français d'Acoustique*, pp. 475-478
- [4] D. Young and A. Deshmane, "Bowstroke Database: A Web-Accessible Archive of Violin Bowing Data" Proc. Conference of New Interfaces for Musical Expression (NIME'07) (2007), New York, N.Y., U.S.A. pp 352 - 357.
- [5] M. Demoucron and R. Caussé, "Sound synthesis of bowed string instruments using a gesture based control of a physical model" Proc. ISMA'07 (2007), Barcelona
- [6] A. Askenfelt, "Measurement of bow motion and bow force in violin playing" J. Acoust. Soc. Am. **80**(4), 1007-1015 (1986).
- [7] K. Guettler, E. Schoonderwaldt and A. Askenfelt, "Bow speed or bowing position—which one influences the spectrum the most?" Proc. Stockholm Music Acoustics Conference (SMAC'03) (2003), Sweden. 67-70.